

HSF



RoHS

SPECIFICATION

Current Rating: 1.5Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65 °C to +125 °C
Contact Material: Brass
Insulator Material: PA6T UL 94V-0 Black

Ordering Code:

FHDM07 - X - X - S - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦

① Series No:

② No. of Contacts
01 To 40

③ Contact Plating:

G0: Gold flash S0: Selective
G1: 3U" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"

SN: Tin



④ Connector Type
S: Single⑤ Plastic High:
H: 6.35Please mark the
desired length in the H

⑥ Insulator Material



B: PA6T
C: LCP
D: PA46
E: PA9T

⑦ Packing

A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP

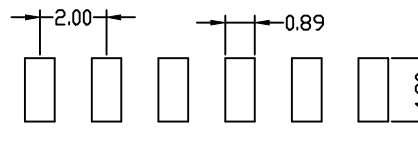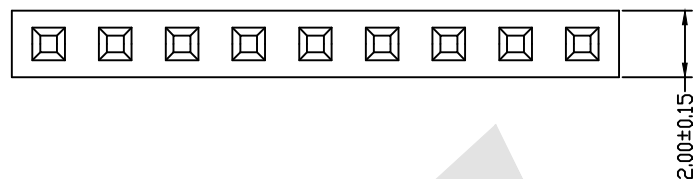


PCB LAYOUT

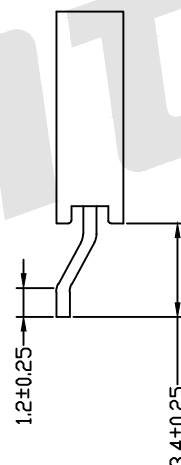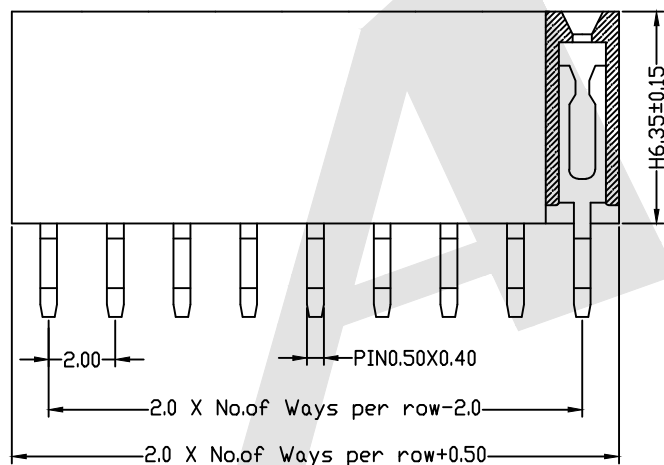

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE:
As ShownUNIT:
mmDRAW
YG ZHONGDATE
01/05/2016CHECK
BobYangDATE
01/05/2016

3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

2.00mm Female Header
Single Row Angle SMT Type

DRAWING NO:

FHDM07-XXSXXX

PRODUCT NO:

FHDM07-XXSXXX

REV

DESCRIPTION

DATE