

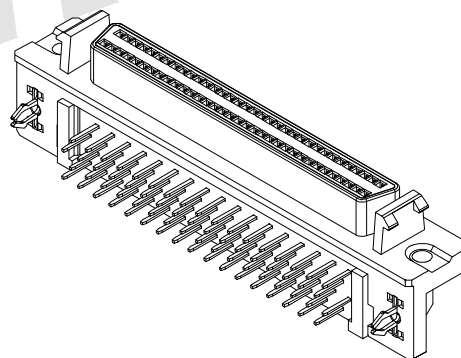
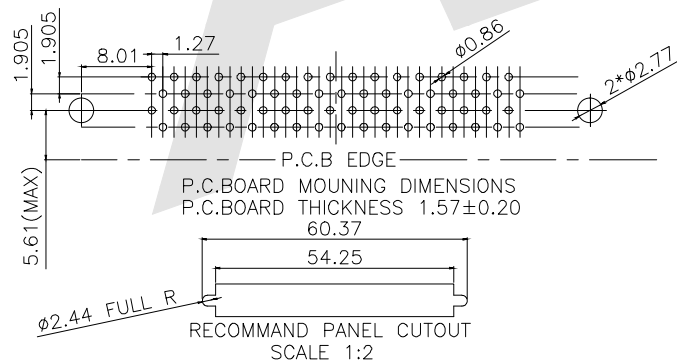
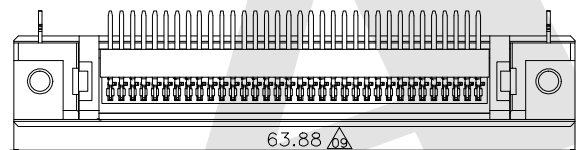

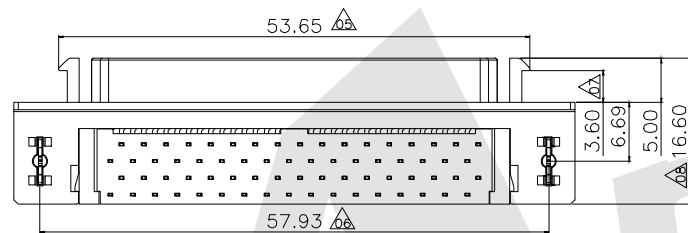


HSF

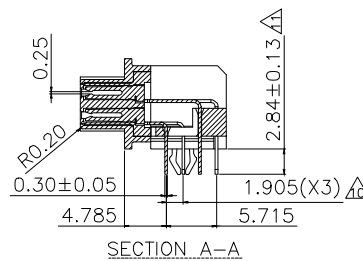

ROHS

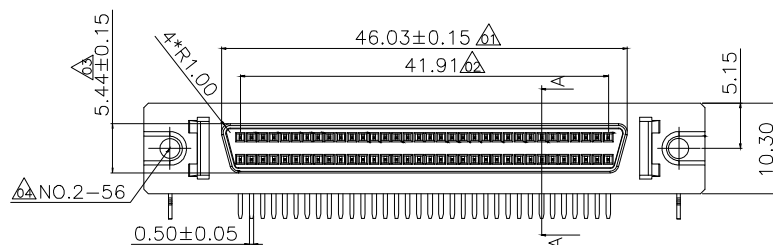

SPECIFICATIONS:

1. Electrical Characteristics:

- 1.1 Contact Current Rate: 3AMP
- 1.2 Insulation Resistance: 1000MΩ Minimum
- 1.3 Contact Resistance: 25MΩ Maximum
- 1.4 Dielectric Voltage: 500V AC For One Minute

2. Material:

- 2.1 Insulator: PBT+30%G/F
- 2.2 Contact: C5191-H
- 2.3 Board Lock: Brass
- 2.4 Bracket: ZINC Alloy

3. Finish

- 3.1 Bracket: Nickel Plated
- 3.2 Contact: Gold Plated On Contact Area, Tin Plated On Soldering End, Nickel Under-Plating
- 3.3 Board Lock: Tin Plated Over, Nickel Under-Plating

4. Environment:

Operation Temperature: -55° C To +125° C

Ordering Code:

HPD BR - F - 68 - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

② Contact Type:

F: Female

③ Contact NO.:

68=68P

④ Threaded Finishes:

1: Threaded Insert #2-56

2: Threaded Insert #4-40

3: Threaded Insert M2.6

⑤ Contact Plating:

S0: Gold Flash Selective Plating

S2: 5u" Gold Selective Plating

S4: 15u" Gold Selective Plating

S5: 30u" Gold Selective Plating

⑥ Bracket Finishes:

L: Latch Bracket


S: Screw Bracket

Unless Otherwise specified tolerance
X. XX: ±0.20
X. X: ±0.25 X. XXX: ±0.15

SCALE: As Shown UNIT: mm

DRAW Jack Bao DATE 9/02/2018

CHECK Bob Yang DATE 9/02/2018



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE: 1.27mm Series 68P Receptacle Headers
Right-Angle Mount Pin Type

DRAWING NO: HPD BR-F68XXX

PRODUCT NO: HPD BR-F68XXX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8